

Wireless Multi-function AP

EAP-3660-IL

2.4GHz

Super G 108Mbps

Access Point/ WDS/Universal Repeater

The EAP-3660-IL is a smoke detector looking Wireless Access Point / Universal Repeater / WDS that operates seamlessly in the 2.4 GHz frequency spectrum supporting the 802.11b (2.4GHz, 11Mbps) and Super high speed of 802.11g (2.4GHz, 108Mbps) wireless standards. It's the best way to add wireless capability to your existing wired network, or to add bandwidth to your wireless installation.

EAP-3660-IL features high receivable sensitivity along with antenna diversity. High sensitivity can extend range and coverage to reduce the roaming between Access Points to get a more stable wireless connection. It also reduces the expense of equipment in the same environment.

To protect your wireless connectivity, it can encrypt all wireless transmissions through 64/128-bit WEP data encryption and also supports WPA/WPA2. The MAC address filter lets you select exactly which stations should have access to your network. In addition, the User Isolation function can protect the private network between client users.

The attractive design, high performance, and array of features make EAP-3660-IL a suitable wireless solution for your residence or office.



Package Content

- 1* High power multi-function AP (EAP-3660-IL)
- 1* 12V/1A Power Adapter
- 1* CAT5 UTP Cable
- 1*QIG
- 1*CD (User's Manual)
- 1* wall mount screw set

* Theoretical wireless signal rate based on IEEE standard of 802.11b, g, chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.

Features	Benefits
Super G solution up to 108Mbps	Capable of handling heavy data payloads such as MPEG, video streaming, large file transfer and VoIP
Output Power up to 20 dBm	Extended excellent Range and Coverage (fewer APs)
IEEE 802.11b/g Compliant	Fully Interoperable with IEEE 802.11b/IEEE802.11g compliant devices
Embedded Antenna	Users won't see antenna in your building environment
Point-to-point, Point-to-multipoint Wireless Connectivity	Let users transfer data between two buildings or multiple buildings
WDS (Wireless Distributed System)	Make wireless AP and Bridge mode simultaneously as a wireless repeater
Repeater	The easiest way to expand your wireless network's coverage
Support Multi-SSID function (4 SSID) in AP mode	Allow clients to access different networks through a single access point and assign different policies and functions for each SSID by manager
Antenna diversity support	Enhance the traffic signal
WPA2/WPA/ IEEE 802.1x support	Powerful data security
MAC address filtering in AP mode(up to 50)	Ensures secure network connection
User isolation support (AP mode)	Protect the private network between client users.
Power-over-Ethernet (IEEE802.3af)	Flexible Access Point locations and cost savings
Keep personal setting	Keep the latest setting when firmware upgrade
SNMP Remote Configuration Management	Help administrators to remotely configure or manage the Access Point easily.
QoS (WMM) support	Enhance user performance and density

* Theoretical wireless signal rate based on IEEE standard of 802.11b, g, chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.

Technical Specifications

Hardware Specifications

MCU	Atheros AR2316, 180MHz
Memory	16MB SDRAM
Flash	4MB
Expansion Slots	N/A
Physical Interface	<ul style="list-style-type: none">● LAN: One 10/100 Fast Ethernet RJ-45● Reset Button● Power Jack
LEDs Status	<ul style="list-style-type: none">● Power/ Status● LAN (10/100Mbps)● WLAN (Wireless Connection)
Power Requirements	<ul style="list-style-type: none">● Power Supply: 90 to 240 VDC \pm 10%, 50/60 Hz (depends on different countries)● Active Ethernet (Power over Ethernet, IEEE802.3af)- 48 VDC/0.375A● Device: 12V/1A
Regulation Certifications	<ul style="list-style-type: none">● FCC Part 15, ETSI 300/328/CE

* Theoretical wireless signal rate based on IEEE standard of 802.11b, g, chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.

➤ Housing Look

- **Press 1 second**
Reset/Reboot
- **Press 5 seconds**
Reset to factory default



➤ RF Specification

Frequency Band	2.400~2.484 GHz
Media Access Protocol	Carrier sense multiple access with collision avoidance (CSMA/CA)
Modulation Technology	<ul style="list-style-type: none"> • OFDM: BPSK, QPSK, 16-QAM, 64-QAM • DBPSK, DQPSK, CCK
Operating Channels	11 for North America, 14 for Japan, 13 for Europe
Receive Sensitivity (Typical)	<ul style="list-style-type: none"> • IEEE802.11g 6Mbps@ -92dBm 54Mbps@ -74dBm • IEEE802.11b 1Mbps@ -97dBm 11Mbps@ -89dBm
Available transmit power	<ul style="list-style-type: none"> • IEEE802.11g 20dBm@6~24 Mbps 19dBm@36 Mbps 18dBm@48 Mbps 17dBm@54Mbps

* Theoretical wireless signal rate based on IEEE standard of 802.11b, g, chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.


** All specifications are subject to change without notice.

	<ul style="list-style-type: none"> IEEE802.11b 20dBm@1 ~ 11Mbps
Antenna	Directional Embedded antenna (Diversity support) Antenna Gain = 4 dBi

• **Antenna Specification**

Standard	IEEE 802.11n and 802.11 b/g/
Frequency Range	2.4 to 2.49 GHz,
Peak Gain	4 dBi
VSWR	2:1
Feed Impedance	50 Ohms
Power Handling	30 dBm
Interface	Two sets of soldering pads for 50 ohm, 1.13mm diameter, micro coax cable
Antenna Dimensions	100 x 50 (mm)
Weight	0.3oz (9 grams)

• **Antenna Radiation Patterns**

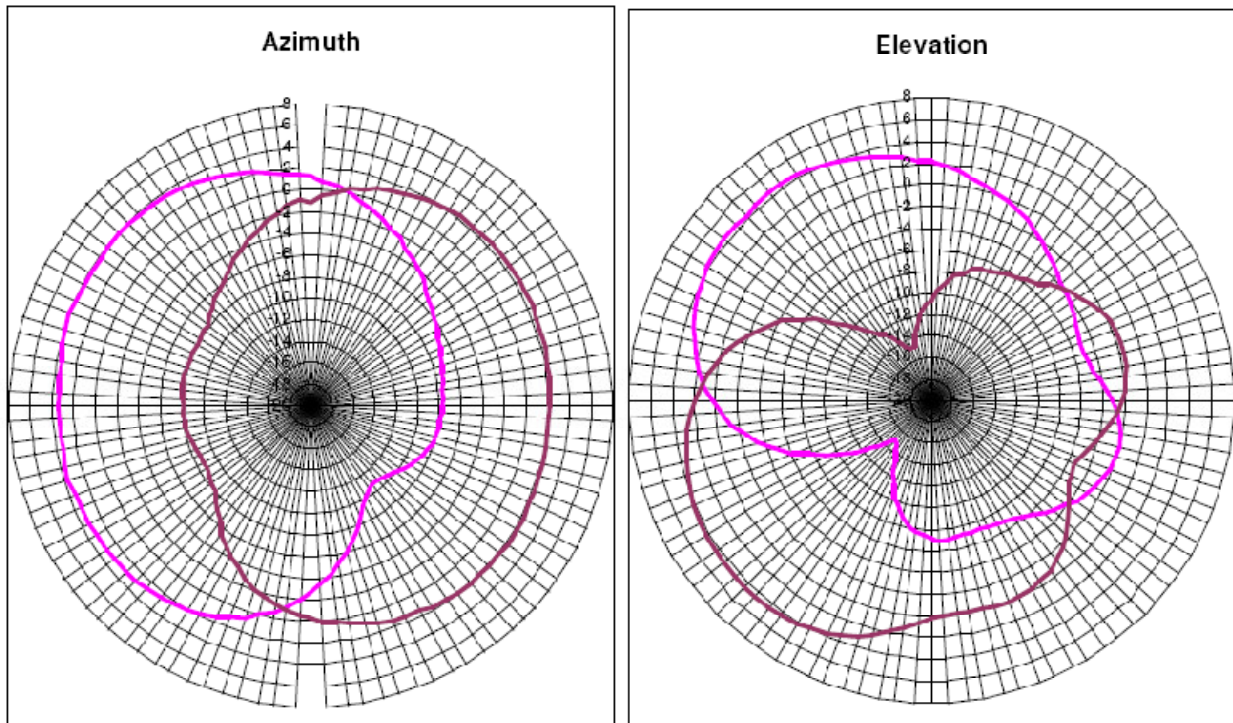

* Theoretical wireless signal rate based on IEEE standard of 802.11b, g, chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.

• **Software Features**

➤ **Setting**

Topology	Infrastructure
Operation Mode	Access Point/ Repeater/WDS
LAN	DHCP Client
VPN	VPN pass-through (PPTP, L2TP, IPSEC)
Wireless	<ul style="list-style-type: none"> • Wireless Mode – 11b / 11g / Super G / Disable • Channel Selection (Setting varies by Country) • Transmission Rate <ul style="list-style-type: none"> ➤ 11 b/g: 108, 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 in Mbps • Transmit power control (by dBm) • Antenna Diversity
Security	<ul style="list-style-type: none"> • WEP Encryption-64/128/152 bit • WPA Personal (WPA-PSK using TKIP or AES) • WPA Enterprise (WPA-EAP using TKIP) • 802.1x Authenticator • Hide SSID in beacons • Multiple SSID with 802.1q VLAN tagging (up to 4 SSIDs) • MAC Filter • L2 isolation • Wireless STA (Client) connected list
QoS	<ul style="list-style-type: none"> • WMM

➤ **Management**

Configuration	Web-based configuration (HTTP)/Telnet
Firmware Upgrade	<ul style="list-style-type: none"> • Upgrade firmware via web-browser • Keep latest setting when f/w update
Administrator Setting	<ul style="list-style-type: none"> • Administrator password change
Reset Setting	<ul style="list-style-type: none"> • Reboot (press 1 second) • Reset to Factory Default (press more than 5 seconds)

* Theoretical wireless signal rate based on IEEE standard of 802.11b, g, chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.

System monitoring	Status, Statistics and Event Log
SNMP	V1, V2c
MIB	MIB I, MIB II (RFC1213)
Backup & Restore	Settings through Web

• **Environment & Physical**

Temperature Range	<ul style="list-style-type: none"> • Operating: 0°C to 45 °C (32 °F to 113 °F) • Storage: -20°C to 70 °C (-4 °F to 158 °F)
Humidity (non-condensing)	5%~95% typical
Dimensions	Diameter:120mm Height: 50mm
Weight	280g

V4.0

* Theoretical wireless signal rate based on IEEE standard of 802.11b, g, chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.